

HIGHLIGHTS
WWW.HIGHLIGHTSINDIA.IN

THIS DISTINGUISHES OUR HIGHLIGHTS

ROUND, SQUARE OR LINEAR



The design of Visco luminaires offers almost any light distribution - thanks to lens / reflector technology that's independent of the luminaire Visco geometry.

LIGHT FOR VIDEO MEETINGS



The light of our luminaires with in-house developed driver is flicker-free and therefore ideal for video conferences, retail spaces and good for health as well.

EXTREMELY DURABLE



Due to our excellent maintenance of Visco flux, Visco luminaires feature high investment security: L80/B10 with up to 50,000 operating hours. At 12 hours a day, this means over 10 years of low-maintenance operation with outstanding photometric characteristics - ideal for locations.

TUNABLE WHITE TECHNOLOGY



Just as the outdoor colour temperature changes during the day the colour temperature of lighting indoors can be adjusted to support different lighting concepts.

VERY HIGH VISUAL COMFORT



Darklight reflectors or anti-dazzle louvres: both enable standard compliant lighting with $UGR < 19$.

SETTING MAGICAL ACCENTS WITH SPOT LIGHTS



Visco spot lights blend almost invisibly into the architecture helping create magical accents with

- 8° - 12° Narrow spot
- 24° - 30° Spot
- 36° - 40° Flood
- 50° - 60° Wide Flood
- 110° - 120° Extra wide flood






ULTRA-EFFICIENT LIGHTING



Lighting accounts for approximately 20 percent of electricity use in both domestic and commercial applications. Visco offers a complete line of LED lighting solutions that significantly reduce electricity consumption and operating costs through high power factor control gear.

COLOUR RENDERING INDEX



Visco light source helps to reveal the truest colors of various objects in comparison with natural light source with our CRI > 80+ versions.

SHALLOW RECESS DEPTH



In tight installation situations every millimeter is decisive. Just 45mm is sufficient for especially deep recessed luminares.

EXCELLENT THERMAL MANAGEMENT



The design of our housings made of high grade cast aluminum ensure outstanding thermal management enabling long life span.

WIDE SPECTRUM OF CCT



Visco offers a wide range of Correlated Colour Temperature (CCT) from 2700K to 6500K for various application in residences, offices and hotels.

CONNECTIVITY



Wireless or wired
With technologies such as bluetooth and Dali we always offer you the right interface.



LINEAR^{SERIES}


UP - DOWN PROFILE



GLASS SHELF PROFILE










		MODEL	SIZE	MAXIMUM	PCB
		SLIM UP-DOWN	50*17 MM	3 Meter	10 MM
		BROAD UP-DOWN	90*42MM	3 Meter	12 MM

		MODEL	SIZE	MAXIMUM	PCB
		GLASS SHELF PROFILE	17*11MM	3 Meter	5 MM

RECESSED
PROFILE











RECESSED

		MODEL	SIZE	MAXIMUM	PCB
		1013 Trim	10x13 MM	3 Meter	5 MM
		1612 Trim	16x12 MM	3 Meter	10 MM
		1707 Trim	17x7 MM	3 Meter	10 MM
		1408 Trim	14x8 MM	3 Meter	10 MM
		2510 Trim	25x10 MM	3 Meter	15 MM
		2525 Trim	25x25 MM	3.6 Meter	15 MM
		3535 Trim	35X35 MM	3.6 Meter	30 MM
		5035 Trim	50X35 MM	3.6 Meter	30 MM

SURFACE PROFILE





		MODEL	SIZE	MAXIMUM	PCB
		0809 Trimless	7.8X9 MM	3 Meter	5 MM
		1013 Trimless	9.9X13 MM	3 Meter	5 MM
		1707 Trimless	17X7 MM	3 Meter	10 MM
		1714 Trimless	16.8X14.3 MM	3 Meter	10 MM
		2310 Trimless	23.3X9.6 MM	3 Meter	15 MM
		2518 Trimless	25X18 MM	3 Meter	15 MM
		2626 Trimless	26X26 MM	3 Meter	15 MM
		3520 Trimless	35x20 MM	3 Meter	15 MM
		3535 Trimless	35x35 MM	3 Meter	30 MM
		5035 Trimless	50x35 MM	3.6 Meter	30 MM


CORNER
PROFILE



HANGER
PROFILE



		MODEL	SIZE	MAXIMUM	PCB
		1616	16x16 MM	3 Meter	10 MM
		1818	18x18 MM	3 Meter	10 MM



		MODEL	SIZE	MAXIMUM	PCB
		2010	20x10 MM	3 Meter	10 MM


FURNITURE
SPECIAL PROFILE



BENDABLE
PROFILE






		MODEL	SIZE	MAXIMUM	PCB
		ANGULAR	20x8 MM	3 Meter	5 MM
		SHELF UP-DOWN	20x15 MM	3 Meter	10 MM

		MODEL	SIZE	MAXIMUM	PCB
		BENDABLE	18x4 MM	3 Meter	10 MM

HANGING PROFILE







		MODEL	SIZE	MAXIMUM	PCB
		3566	35x66 MM	3 Meter	15 MM
		5575	55x75 MM	3 Meter	30 MM
		7590	75x90 MM	3.6 Meter	30 MM


TRIM
PROFILE




WALK OVER
PROFILE



		MODEL	SIZE	MAXIMUM	PCB
		1213	50x13 MM	3 Meter	5 MM
		2314	66x13 MM	3 Meter	10 MM
		1213 SET IN	38x23 MM	3 Meter	5 MM
		1213 SET OUT	48x21 MM	3 Meter	5 MM


		MODEL	SIZE	MAXIMUM	PCB
		WALKOVER	27x11 MM	3 Meter	10 MM

ANODIZED/PU
PROFILE









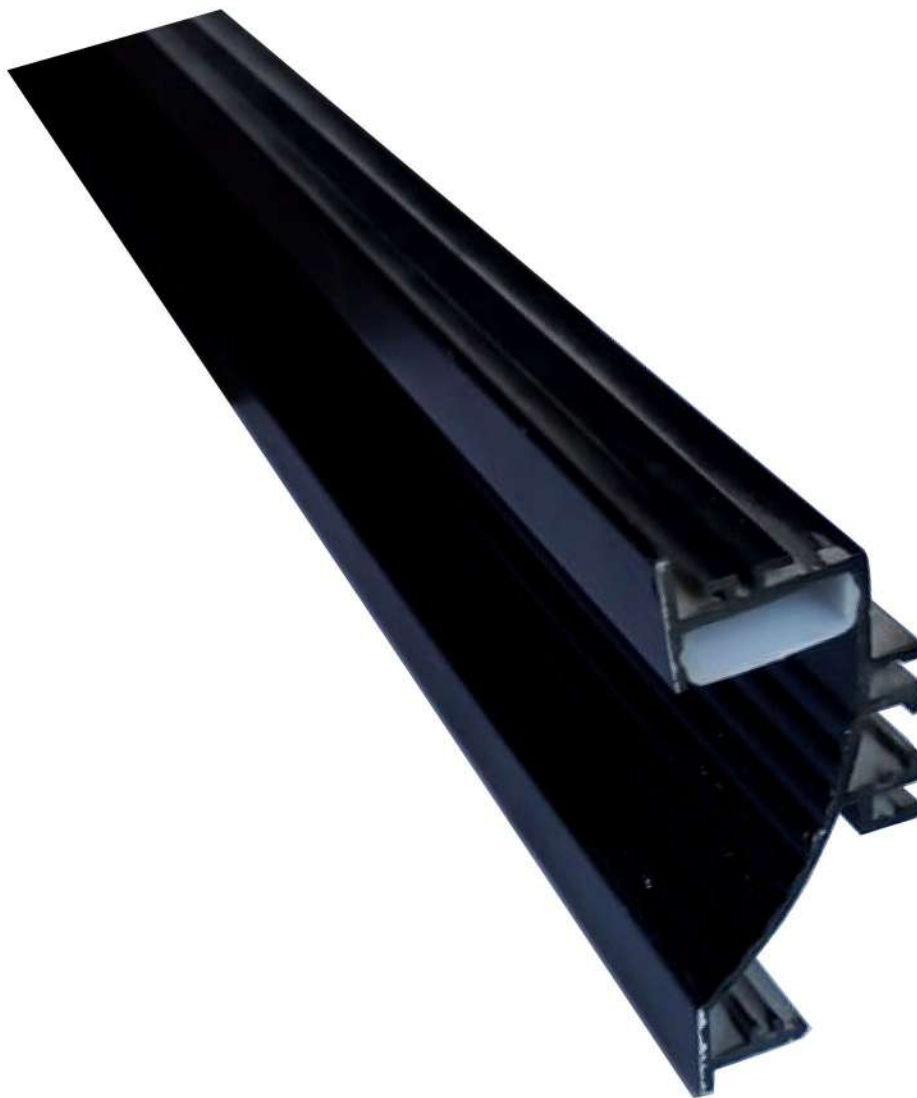


	MODEL	SIZE	MAXIMUM	PCB
	3280	32x80 MM	3 Meter	10 MM

NEON






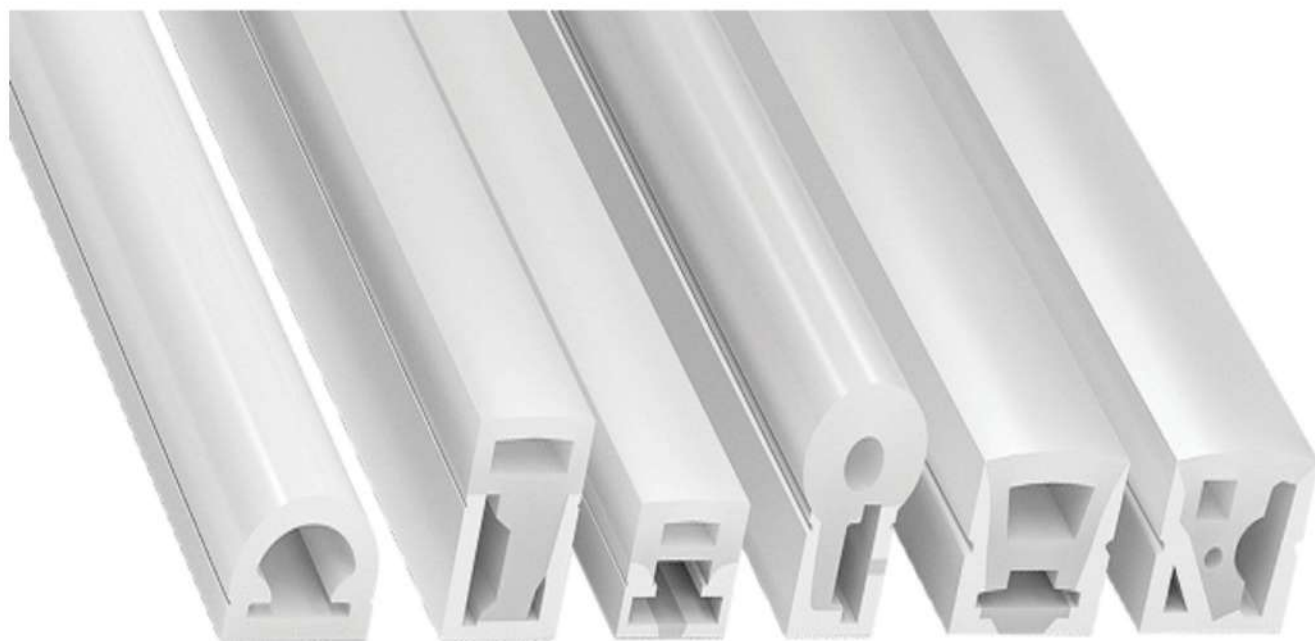








NEON

		MODEL	SIZE	MAXIMUM	PCB
		NF 10	1010	100 Meter	6 MM
		NF 10-2	1010-2	100 Meter	6 MM
		NF 12	1212	100 Meter	8 MM
		NF 12-2	1212-2	100 Meter	8 MM
		NF 12-3	1212-3	100 Meter	5 MM
		NF 16	1616	100 Meter	10 MM
		NF 16-2	1616-2	100 Meter	10 MM
		NF 22	2222	100 Meter	5 MM

NEON



		MODEL	SIZE	MAXIMUM	PCB
		NF 2014	2014	100 Meter	12 MM
		NF 2014-2	2014-2	100 Meter	12 MM
		NF 20	2020	100 Meter	10 MM
		NF 2020-2	2020-2	100 Meter	10/12 MM
		NF 3020	3020	100 Meter	15 MM
		NF 4025	4025	100 Meter	20 MM
		NF 5025	5025	100 Meter	20 MM

		MODEL	SIZE	MAXIMUM	PCB
		NF 2014	2014	100 Meter	12 MM
		NF 2014-2	2014-2	100 Meter	12 MM
		NF 20	2020	100 Meter	10 MM
		NF 2020-2	2020-2	100 Meter	10/12 MM
		NF 3020	3020	100 Meter	15 MM
		NF 4025	4025	100 Meter	20 MM
		NF 5025	5025	100 Meter	20 MM

GRAZERS



GRAZERS FOR WATER BODY



	MODEL	SIZE	WATTAGE	COLOUR
	VISCO 7 WATT	1 Meter	7 WATT	Mono
	VISCO 9 WATT	1 Meter	9 WATT	Mono
	VISCO 12 WATT	1 Meter	12 WATT	Mono
	VISCO 18 WATT	1 Meter	18 WATT	Mono
	VISCO 24 WATT	1 Meter	24 WATT	Mono
	VISCO 32 WATT	1 Meter	32 WATT	Mono / RGB
	VISCO 40 WATT	1 Meter	40 WATT	Mono / RGB / RGBWW
	VISCO 48 WATT	1 Meter	48 WATT	Mono / RGB / RGBWW
	VISCO 55 WATT	1 Meter	55 WATT	Mono / RGB / RGBWW
	VISCO 64 WATT	1 Meter	64 WATT	Mono / RGB / RGBWW
	VISCO 71 WATT	1 Meter	71 WATT	Mono / RGB / RGBWW



SPECIFICATION

- * **CONTROL MODE : DMX512**
- * **POWER INPUT : DC+9-12V**
- * **OUTPUT : AC230V-50Hz (AC120V-60Hz) 300Ma, DC9V300Ma**
- * **DIMENSIONS : 482 X 132 X 73 MM**
- * **CHANNEL : 192CH**
- * **CONTROL UP TO : 16 INTELLIGENT LIGHTS**


MADRIX LIGHTING CONTROL



MADRIX LIGHTING CONTROL



HIGHLIGHTS PCB 12V DC

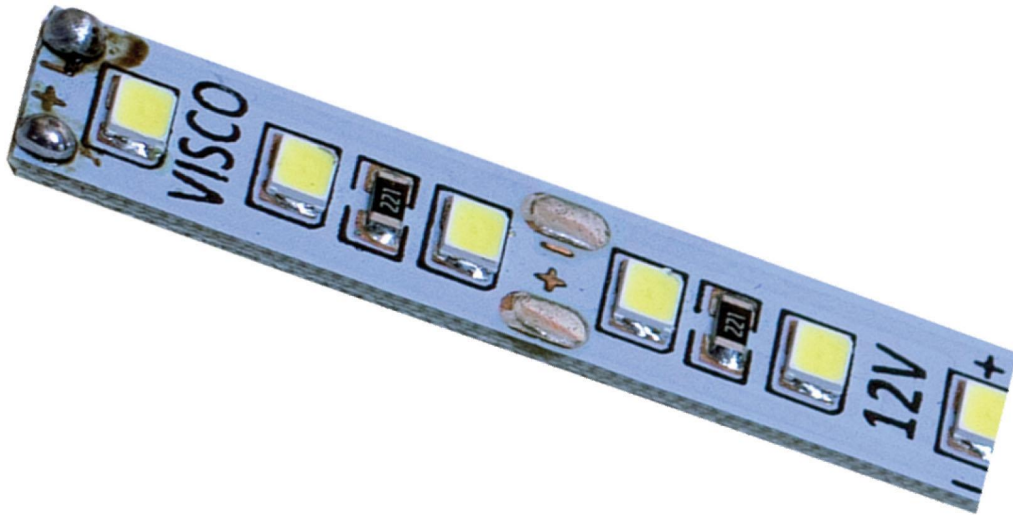

HIGHLIGHTS



SPECIFICATION

- * 12V DC
- * SIZE : 10MM, 1.2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE MOUNTED RIGID
- * WATTAGE : 10W/15W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67


SPECIFICATION

- * 24V DC
- * SIZE : 10MM, 1.2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 10W/15W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67

HIGHLIGHTS PCB 240 LED 16MM, 1.2 MM



HIGHLIGHTS PCB TUNABLE RGB

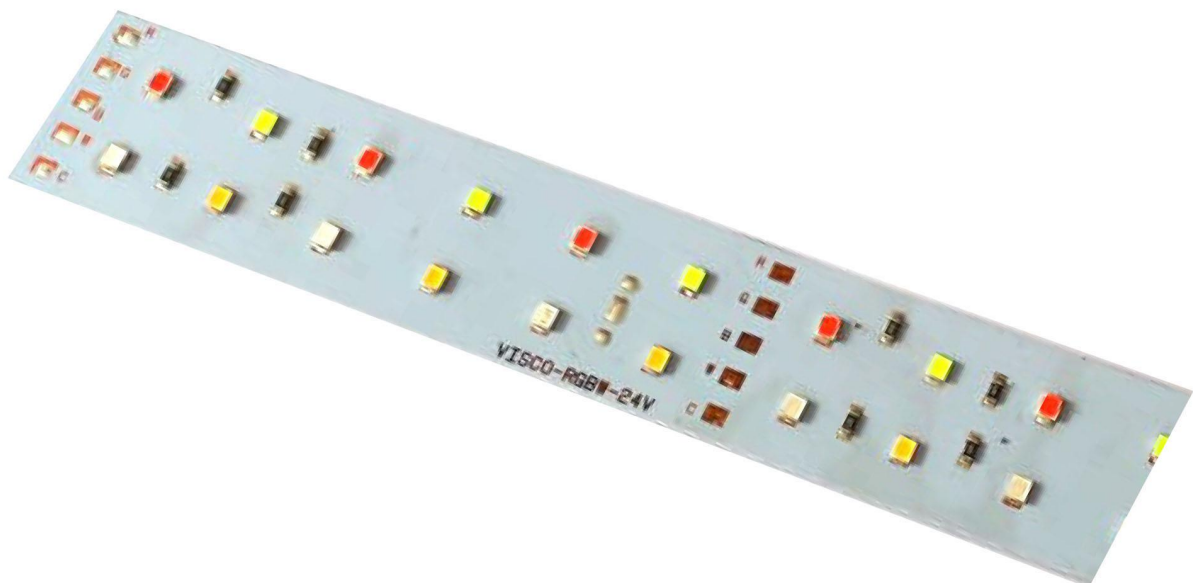

SPECIFICATION

- * 12V DC / 24V DC
- * SIZE : 16MM, 1.2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 18W/28W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67


SPECIFICATION

- * 24V DC
- * SIZE : 25MM, 2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 10W/15W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * RED, GREEN, BLUE, WHITE
- * IP-20, IP-65, IP-67

HIGHLIGHTS PCB LED 20 MM



HIGHLIGHTS SWITCH ON / OFF

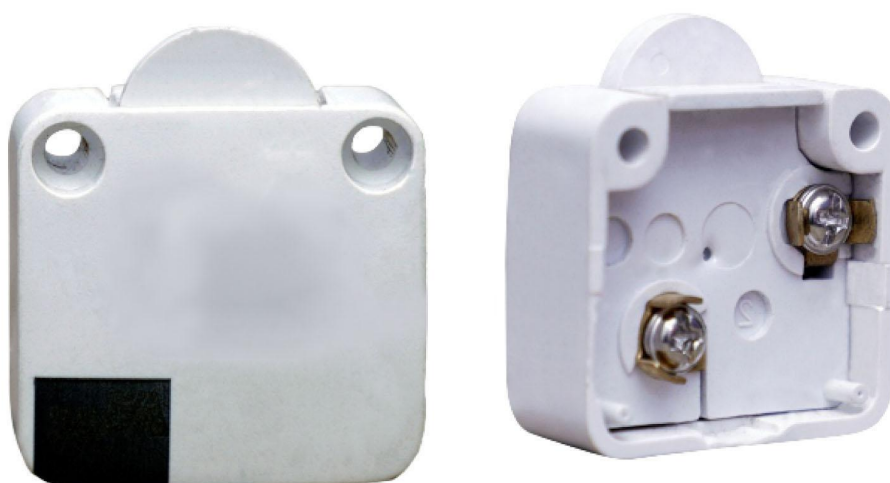

SPECIFICATION

- * 12V DC / 24V DC
- * SIZE : 20 MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 10W PER METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67

SPECIFICATION

- * COLOUR AVAILABLE WHITE / BLACK
- * SIZE - 25x25x10 MM

HIGHLIGHTS DRIVER DIMMABLE



HIGHLIGHTS 12V DC DRIVE




SPECIFICATION

- * **DC - 12V/24V-DIMMABLE**
- * **SIZE : L-195mm, B-100mm, H-45mm**
- * **PHASE CUT DRIVER : TRACK DIMMING**
- * **INPUT VOLTAGE : AC-90-240V, 50-60HZ**
- * **OUTPUT : DC-12V@10AMP 120W**
- * **AUTO CUT TIMMER : 4hr, 6hr, 8hr, 12hr**

SPECIFICATION

- * **CONSTANT VOLTAGE**
- * **OUTPUT 12V DC : Current - 2amp, 3.5amp, 5amp, 10amp, 16.5amp**
- * **INPUT VOLTAGE**
- * **AC-90-240V, IP-20, IP-65**

HIGHLIGHTS CHANGER

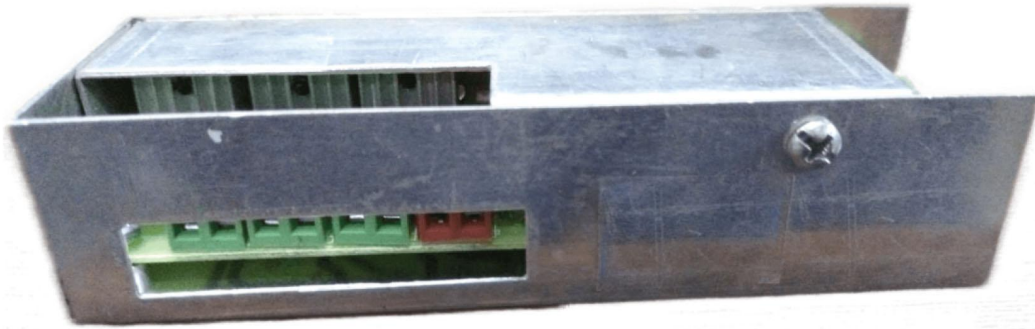

HIGHLIGHTS SENSOR





SPECIFICATION

- * **3 PHASE CHANGER**
SWITCHING ON/OFF
- * **INPUT VOLTAGE : 12V-DC**
- * **SIZE : L-130mm, B-40mm, H-40mm**

SPECIFICATION

- * **POWER SUPPLY DC 12V**
- * **MAX. SWITCHING CAPACITY 60W**
- * **CABLE LENGTH 1500mm**
- * **SENSOR DISTANCE 5-10cm**
- * **APPLICATION : CABINETS, WARDROBES & DRAWERS**
- * **DUST PROOF AGAINST SOLID THINGS &**
- * **WATER PROOF LEVEL IP 20**

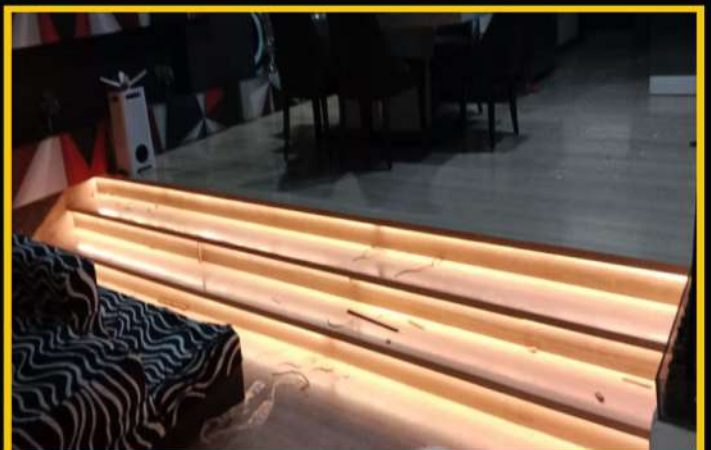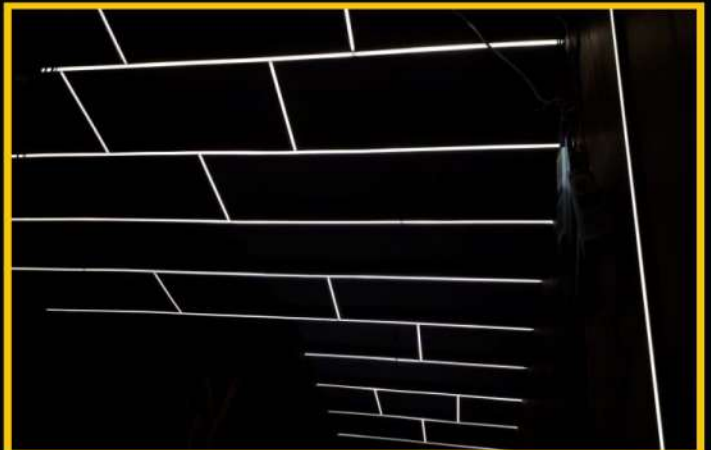




Contact Us

Ph:- +91 8510 043 643

Email:- query.highlightsindia@gmail.com

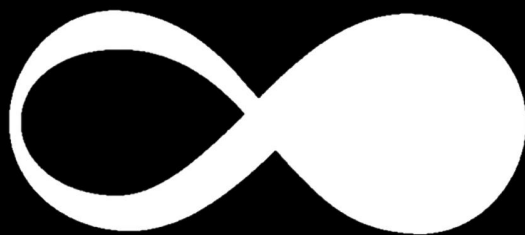

HIGHLIGHTS

WWW.HIGHLIGHTSINDIA.IN